



VINIFICATION

# **SUGAR MIXING TANK**

It can be used for mixing casein, bentonite and many products.



# Patented process : fast and homogeneous mixing thanks to its unique stirring system







### FAST

This sugar mixing tank allow to melt sugar in 750 to 1 000 kg big bags in just 15 minutes.




#### **EASY AND EFFICIENT**

No need to handle bags anymore, only one person needed to load the sugar tank. No product left in the bottom of the tank in the end.

## POLYVALENT Possibility of m

Possibility of mixing casein and keeping homogeneous even low volume into the tank.

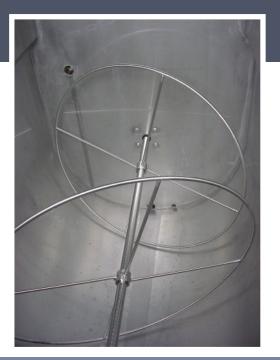

### **TECHNICAL FEATURES**

- Made of 316 L stainless steel : CND 17.11.02.
- 1 stainless steel millimeter-level gauge + 1 stainless-steel level tap.
- 1 DN 50 total drain pipe + ball valve.
- Stainless steel DN 40 full passage at bottom of tank.
- 4 stainless steel feet with wheels Ø 120 (2 fixed and 2 pivoting).
- 1 stainless steel horizontal Ø 30 shaft equipped with tilted hoops for stirring.
- 1 geared motor 1,1 kW output speed 70 tr/min
- 1 circuit breaker box 4A On/Off contactor

### DIMENSIONS

Dimensions	7 hl	18 hl	26 hl
Length	1660	2010	2010
Width	800	1060	1370
Height	1060	1830	1980

## **OPTIONS**

- 2 hinged covers in brushed stainless steel sheets.
- Speed variation by mechanical or electrical variator.
- ➔ Hot/cold heat exchange circuit.
- 3 models available (other formtas on study).







